

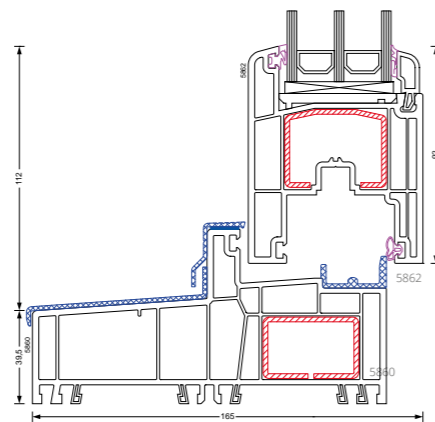
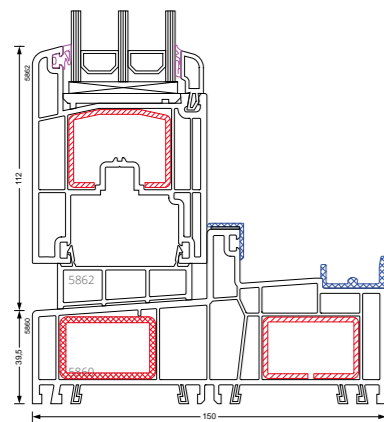
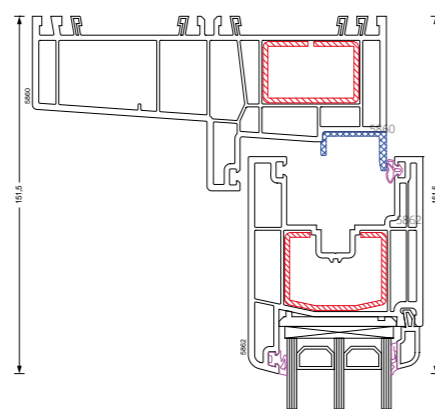


PROFILES CROSS-SECTIONS

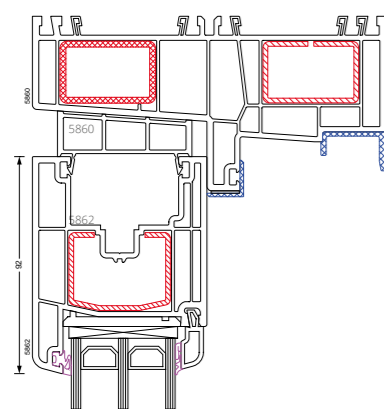

HIGH QUALITY COMPONENTS

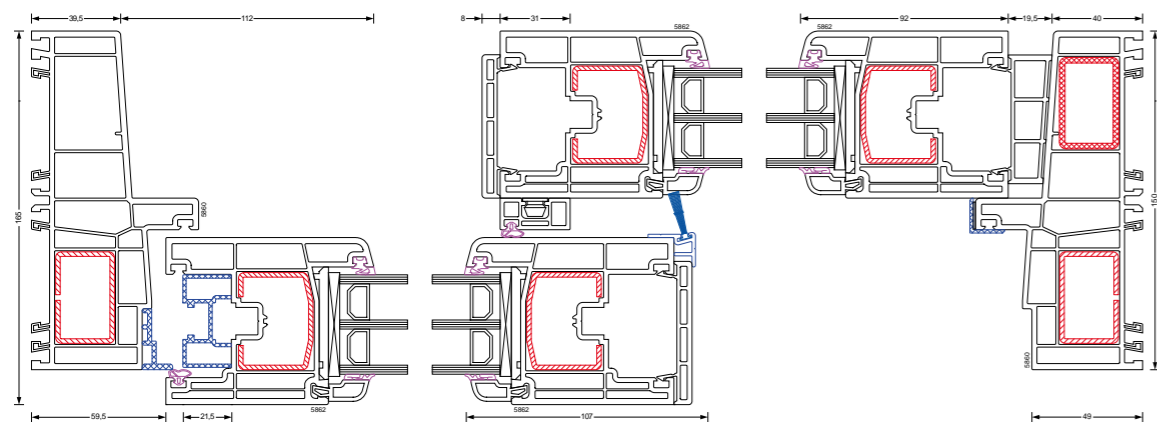

Smart components perfectly meet their functions, while remaining unseen. The special roller systems and the exceptional closing technology ensure easy operation and high level of tightness.




f in @ | amex-baczek.com

G-SLIDE 74



EXTRAORDINARILY TIGHT SLIDING SYSTEM

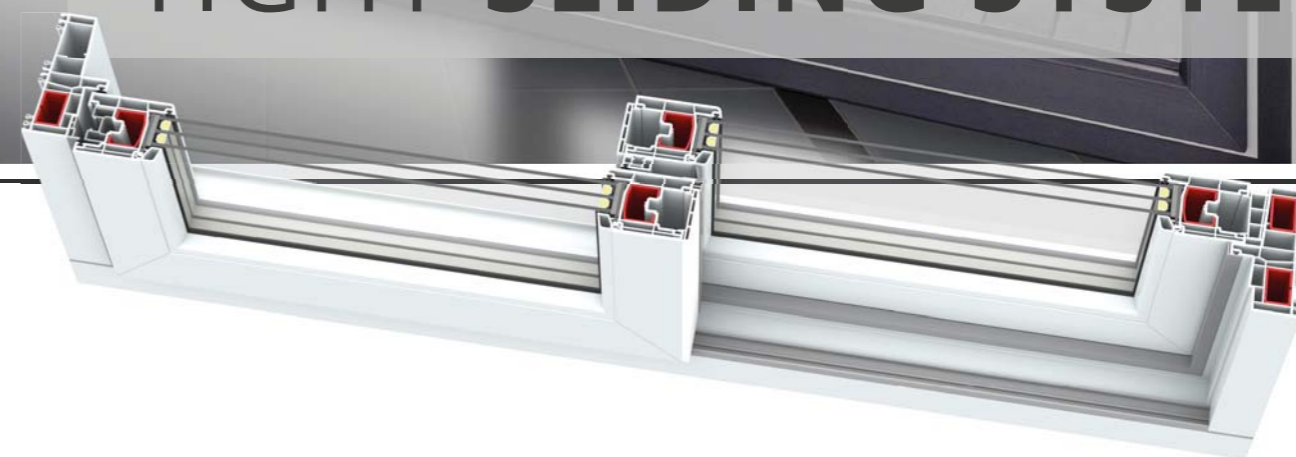

„AMEX-BACZEK” SP. Z O. O. SP. K.  
 Falknowo 13, 14-240 Susz  
 tel. +48 89 648 69 03  
 contact@amex-baczek.com  
 amex-baczek.com  
 NIP 744 14 85 088 REGON 510815144

The information included in this leaflet is for information purposes only. Before purchasing a product, the specification should be verified with the manufacturer or sales representative.

THE SYSTEM PROVIDES GEALAN

THE FITTINGS PROVIDES Roto





# G-SLIDE 74



## CIRCUMFERENTIAL SEALING



Accurately adjusted sealings along entire circumference create the so called "closed sealing", assuring the highest level of tightness and protection against negative impact of weather conditions.

- comfortable sliding
- saving of space
- windproof and rainproof
- high thermal insulation coefficient
- optimum acoustic insulation
- elegant and unobtrusive design





## POSSIBILITIES OF IMPLEMENTATION

### SCHEME A

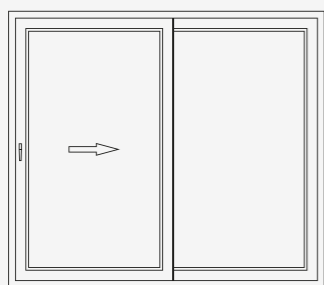

2-element door with sliding leaf and glazed immovable part

### SCHEME C

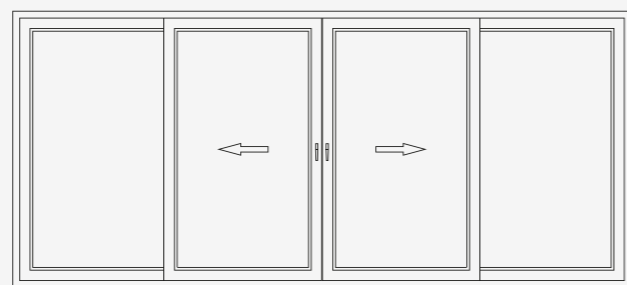

4-element door with 2 sliding leaves and 2 glazed immovable parts

## MINIMUM AND MAXIMUM SIZES OF SASHES AND FRAMES

	SASH SIZES		FRAME SIZES	
	SCHEME A	SCHEME C	SCHEME A	SCHEME C
<b>MAX</b>	width 2000 mm / height 2300 mm	width 1250 mm / height 2300 mm	width 4000 mm / height 2420 mm	width 5000 mm / height 2420 mm
<b>MIN</b>	width 710 mm / height 590 mm	width 710 mm / height 590 mm	---	---


Maximum leaf weight in both variants is 200 kg. The ratio between sash height and width must not exceed 2:1. The given sizes are applicable for both white and colorful structures.

## EXAMPLE OF COLORS AND HANDLE TYPES

## HANDLES TYPES



For details regarding colors ask the PVC Commercial Department at Amex-Baczek or our Trading Partners.

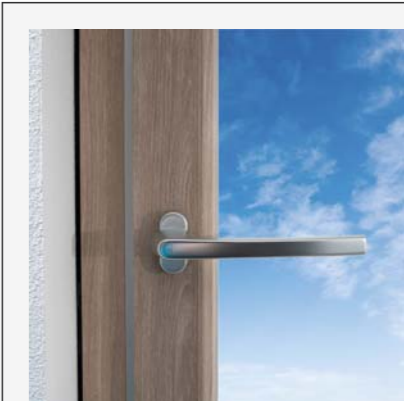

In the G-SLIDE 74 system we use ROTO handles. We offer standard handles, handles with keys or buttons and handles to be mounted underneath sunblinds.

### STANDARD HANDLE COLORS

- › natural silver
- › new silver
- › titanium
- › silver
- › russet
- › middle brown
- › dark brown
- › brown
- › black MAT
- › white
- › creme




### FOR KITCHENS AND SIMILAR APPLICATIONS

The G-SLIDE 74 sliding system can be surely applied in kitchens as a low and oblong window along kitchen furniture. Remember that the ratio between sash height and width must not exceed 2:1, while its weight must not exceed 200 kg.

## STANDARD VENEERS COLORS

+ 50 colors in a custom palette

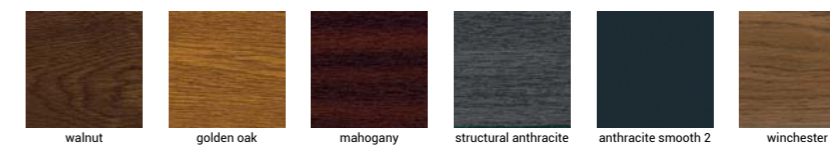

The actual colours may differ from the printed ones. Window profiles can be covered with foil, lacquered or colored in mass. For full colour palette ask our sales representatives or visit amex-baczek.com.